


Figure 1

Fig. 2

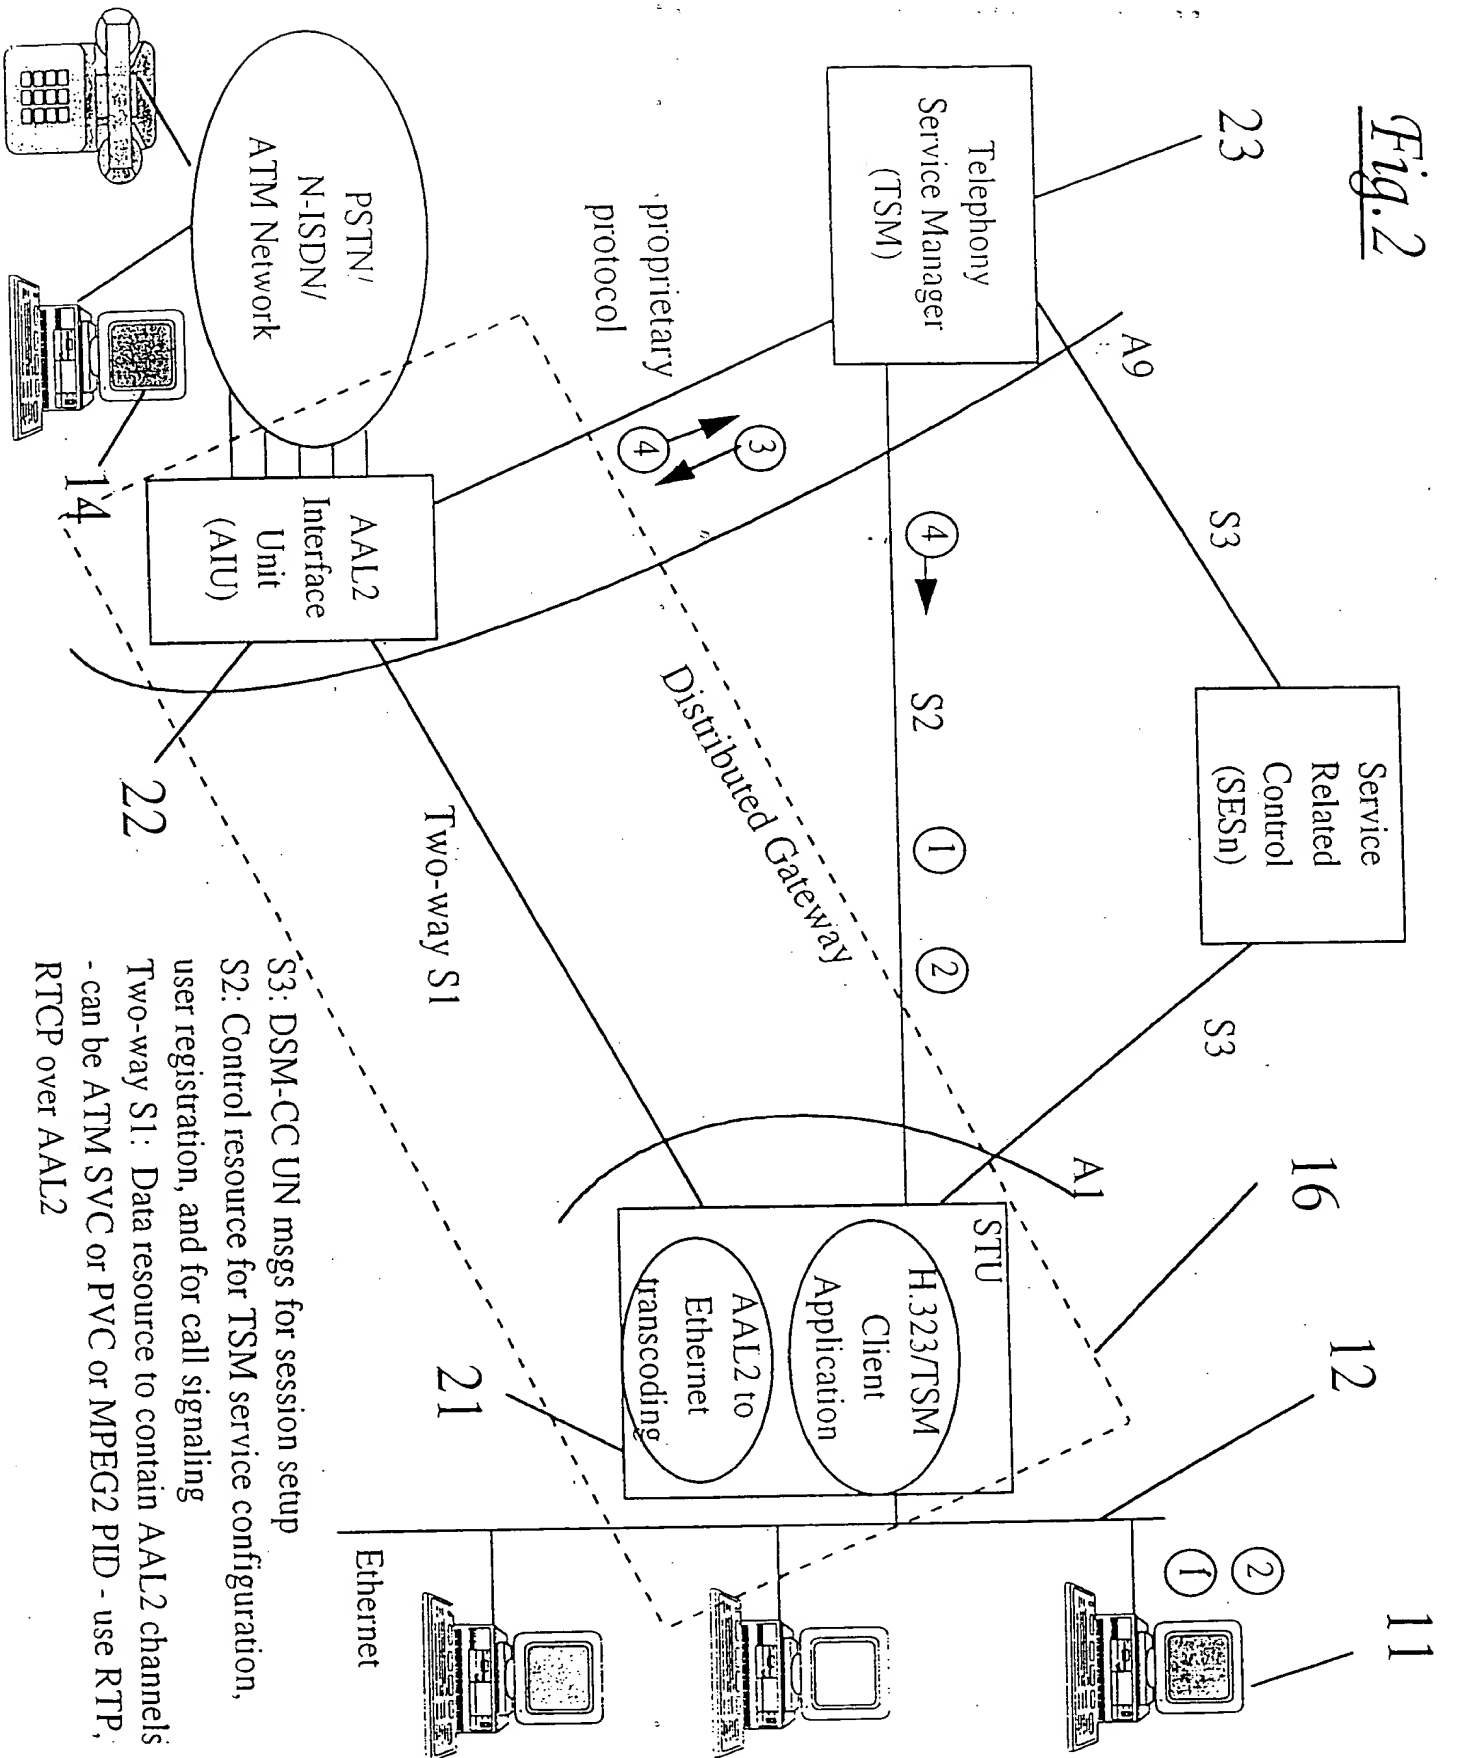

S3: DSM-CC UN msgs for session setup
 S2: Control resource for TSM service configuration,
 user registration, and for call signaling
 Two-way S1: Data resource to contain AAL2 channels
 - can be ATM SVC or PVC or MPEG2 PID - use RTP,
 RTCP over AAL2